


Sports Floor Care

NOTE: Two people are required to complete this procedure as described


FINISH APPLICATION

1

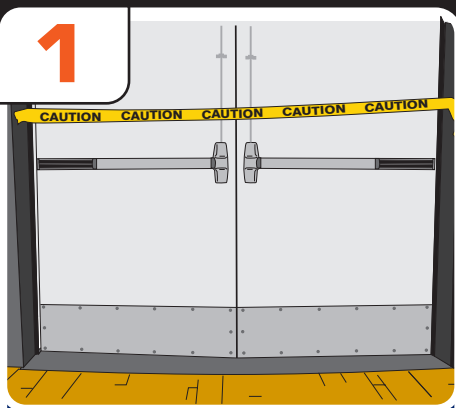


Tape off all entrances with caution tape.

2

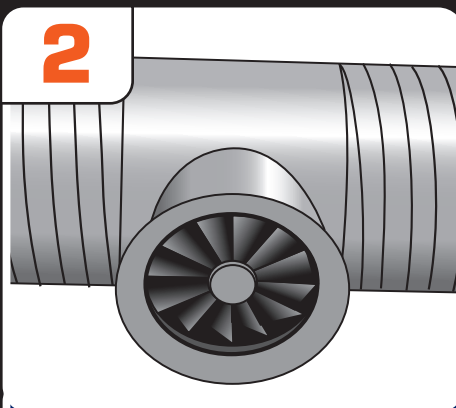

Shut down air handlers and fans.

3

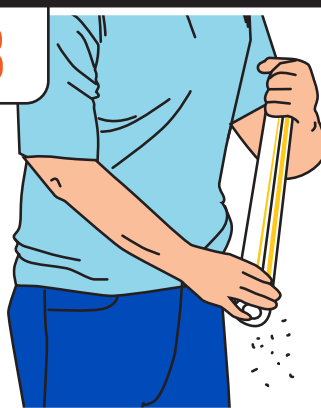


Be sure to shake or pull any loose fibers from weighted T-bar applicator.

4



Gently mix Sport Kote® PC 128SF. Then fill a plastic watering can or the KaiMotion™ with finish. It is a good idea to fill near your starting point so any spills can be feathered into the floor.

5

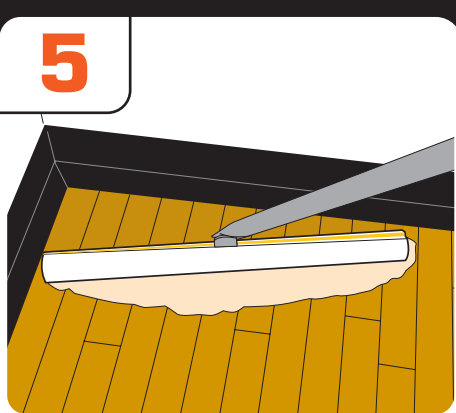


Pour a small puddle of finish on the floor to saturate the pad.

6



Pour a 3" - 4" wide strip down the length of the gym to the opposite corner while pulling your applicator through the finish. Continue back and forth down the floor, pouring additional beads of finish as needed.

7

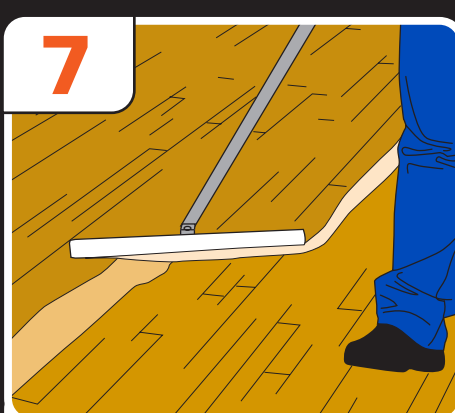

Overlap 4 to 6 inches. Pour finish onto the floor from behind the applicator during each full length pass. Angle the applicator so finish runs off to the unfinished side. Do not allow a puddle to form in front of the applicator.

8



Move at a slow walk (walking too fast may produce excessive bubbling in the finish) and be sure to pour down less finish as you approach the wall.

9



Use caution on turns to eliminate puddles and missed areas.

10




When the watering can or KaiMotion is empty, move it to an unfinished area to refill.

11



After the first coat is applied, consult your product label for recoat times. Wrap your applicator head in a plastic bag.

12

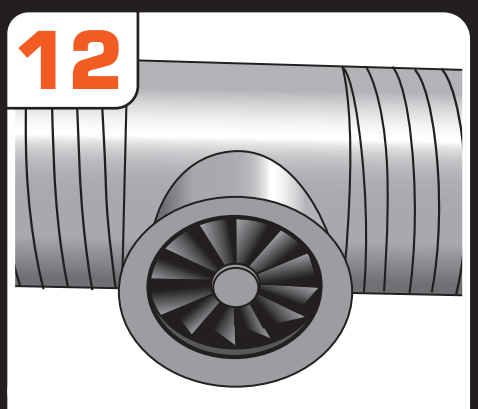

Turn on air handlers and fans once the finish has started to dry to assist in the drying/curing process.

13



When the final coat of Sport Kote PC is completely applied, discard any remaining finish from the watering can or KaiMotion.

14



Remove the applicator from the T-Bar and dispose of the applicator pad properly.

15



Allow 24 hours of cure time after the last coat is applied before opening the gym to traffic.

© 2023 Essential Industries, Inc. C2023

